


El Transportador de Cangilón Continuo WIESE "SEB"




Dimensiones en [mm]

Volumen del cangilón a nivel del agua 100% [l]

Tipo	A	B	C	D	E	F [min.]	H [min.]	I [min.]	K [min.]	P	U	V	Paso del Cangilón	Volumen del Cangilón
SEB 03	338	260	350	80	150	530	885	550	645	260	121	100	99	0,3
SEB 05	478	400	350	200	150	530	885	550	645	260	253	100	99	0,7
SEB 1/05	458	380	460	150	250	820	1.220	750	1.015	410	212	80	165	1,7
SEB 1	598	500	500	150	250	970	1.900	840	1.255	410	212	100	165	1,7
SEB 2/05	518	440	550	200	250	1.100	1.740	940	1.365	550	267	80	198	3,0
SEB 2	668	570	600	200	250	1.150	1.900	940	1.415	550	267	100	198	3,0
SEB 4	718	620	600	300	250	1.150	1.900	1.140	1.615	550	392	100	198	5,1
SEB 5	818	700	750	280	400	1.325	2.250	1.290	1.925	750	375	150	215	6,5
SEB 10	1.118	1.000	770	450	400	1.350	2.250	1.290	1.925	750	600	150	215	10

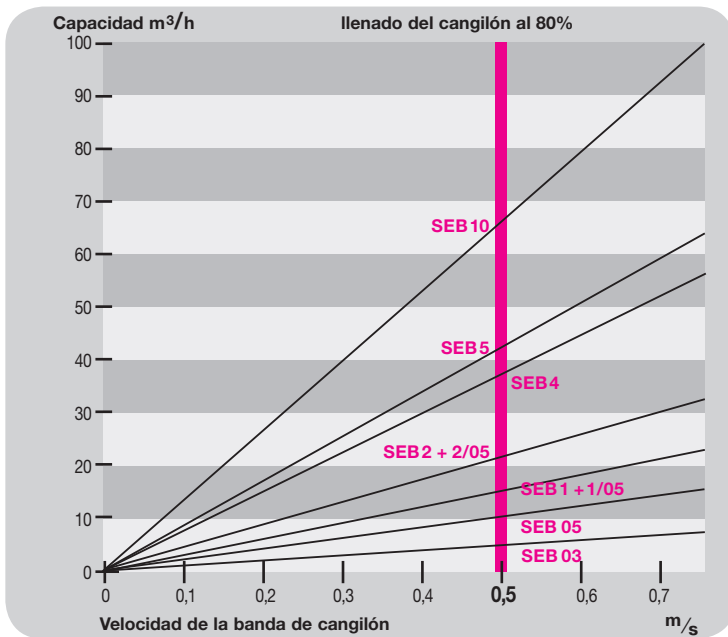

Sujeto a cambio sin previo aviso

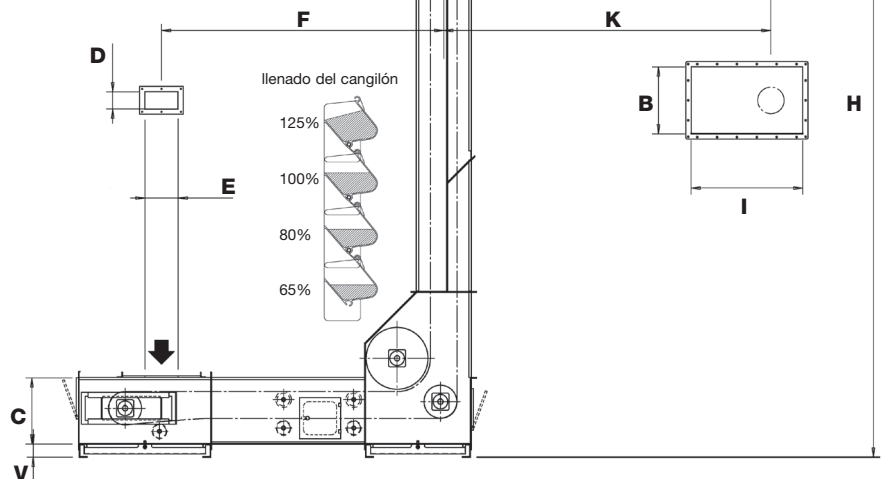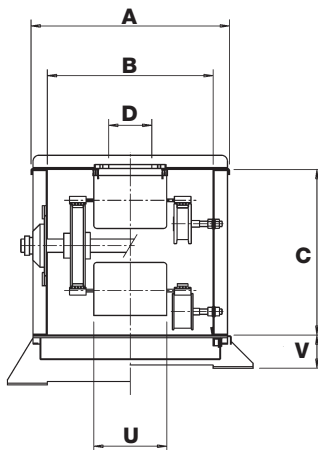

Estamos a su disposición para cualquier consulta al respecto:

WIESE Fördererlemente GmbH · Am Mühlenfelde 1 · D-30938 Burgwedel
Tel. +49(0)5135/188-0 · Fax +49(0)5135/188-30 · info@wiese-germany.com
www.wiese-germany.com

Representación en España: Wisterdam 2ZC S.L.

Av. Diagonal 36 local 7 · ES-08019 Barcelona
Tel. +34(0)902 104 930 · Fax 34(0)933 031 502 · mmuedra@wiese.es · www.wiese.es

